

Starion's spokesmodel (Korean Actor)
KIM HO JIN



Starion Product Guide

| Commercial refrigerators 03 | Side-Dish Table refrigerators 05 | Dish Washer 08 |
| Electric Range 09 | Standing Fan/Airo-Cook 12 | Rotary Heater 13 | Heater 14 |



STARION



Starion Group

Quality Control

Starion produce the best quality product base on manufacturing technology of refrigerator in this field and we try to manufacture useful goods for customer.


50years of Livelihood-Connected Services

We are developing our main technology such as electronic goods, IT, vehicle component so on and our products are involved everywhere.

Customer Satisfaction

Starion always close to customers and giving comfortable life and our mission is make customer happy.

◦ Oversea incorporation establishment state below:

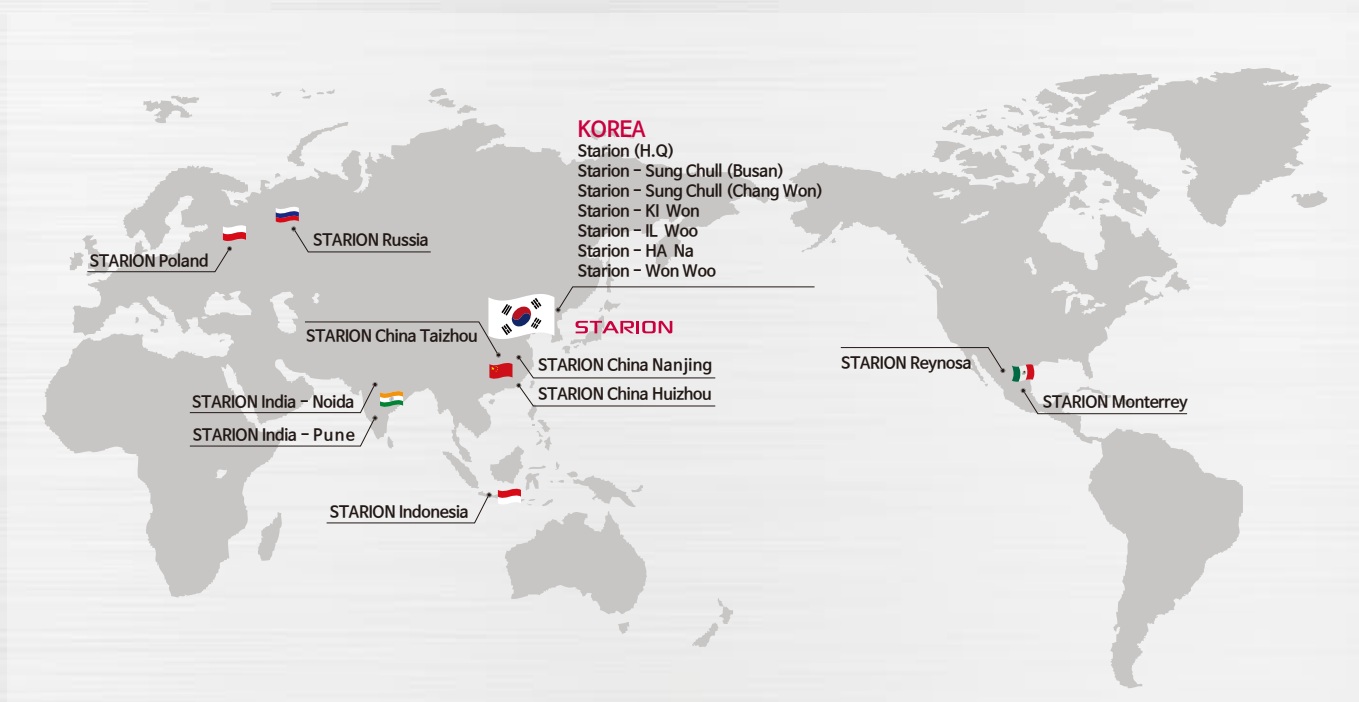

Keep the ingredients fresher!

Starion's 50years of technology guarantee you the quality.



2grade of Energy Efficiency Standard

Everyday refrigerator is working and worry about electric fee Starion commercial refrigerators is out of electric fee! (only for cold store product, the others might be 3 grade)

67%

1year electric fee is only 100USD

67% cheaper than competitor company's product (SR-S45A*, testing result under the standard of ISO5502)

43dB


43dB Designed as low noise

Seem like not working?! It is definitely working! (SR-S25D *Only for this model)




No silicon, no mold!

No need to worry about the mold from refrigerator, and there is no silicon in between the gaps present in the refrigerator.




High density polyurethane Foaming

We differentiated the Thickness of foaming for each part by minimizing the waste of heat in the interior & exterior and researching on the optimal thickness.




Automatically closing door on 45 degree angle

Automatically door closing function is automatically closing the door during the state of DOOR OPENED within 45 degree angle and is needed for kitchens in business who often have to open and close the refrigerator door.



A Drain structure that considers its users

We designed the back of the refrigerator 1 degree higher than the front part of it, and additionally made waterway so that water will naturally gather in the front part. The drainage and cleaning can be easily done through the drainage hole located in-front, without having to remove the foods that were inside the refrigerator.



Quick freeze in refrigerator

Automatically will be shut off in 2hours of operation when you press the button. You can store ingredients fast and easy with only press button one time.



Defrost the Freezer

Functionally defrost the freezer, frost by outside-air when you open the fridge hence possible to store the ingredients efficiently.



Designed by Internal Stainless

Designed by premium stainless, easy to cleaning and maintenance.



Easy to handle attemperation device

Temperature control is freely done by the application of sensor, and external identification is made simple. And we maintain freshness of food for long time with its best condition.



Adoption of the strong refrigerating capacity LG COMPRESSOR

We provide a strong refrigerator with the LG compressor, which is the byword for compressor.



Adjustable height of the rack

It is possible to make use of the space rationally depending on the quantity of food stored by applying a rack with adjustable height.



To removing a bottle rack for larger storage space

Starion refrigerator is designed as removing the bottle rack so more ingredients able to store.



LG customer services


All of the Starion products are capable of receiving LG service. (Except dishwasher)

STARION | Commercial refrigerator




2 grade of Energy efficiency

Everyday refrigerator is working and worry about electric fee Starion commercial refrigerator is out of electric fee! (only for cold store product, the others might be 3 grade)



43dB Designed as low noise

Seem like not working? It is definitely working! (SR-S25D *only this model)








No Silicon, No Mold!

No need to worry about the mold from refrigerator, there is no silicon in between the gaps present in the refrigerator.

1100ℓ 45Box - Metal






Type	Model No.	Material		SIZE (WxDxH)mm	Weight (kg)	Voulme(ℓ)			Temperature Range		Power Consumption (kWh/M)
		External	Internal			Freezer	Fridge	Total	Freezer	Fridge	
	1100ℓ 1/4 freezer	SR-S45AI	Metal	STS	157	240	830	1,070	6 Level temperature control (-24℃ ~ 5℃) Rapidity: 32℃ ▶ -5℃ : 58mins	6 Level temperature control (-5℃ ~ 7℃)	63.0 2 grade of Energy efficiency
	SR-S45AS	STS	153								
	1100ℓ 1/2 freezer (Verticality)	SR-S45BI	Metal	STS	147	530	530	1,060	6 Level temperature control (-24℃ ~ 5℃) Rapidity: 32℃ ▶ -5℃ : 79mins	6 Level temperature control (-5℃ ~ 7℃)	80.0 2 grade of Energy efficiency
	SR-S45BS	STS	145								
	1100ℓ 1/2 freezer (Horizontality)	SR-S45CI	Metal	STS	145	532	541	1,073	6 Level temperature control (-24℃ ~ 5℃) Rapidity: 32℃ ▶ -5℃ : 79mins	6 Level temperature control (-5℃ ~ 7℃)	N/A
	SR-S45CS	STS	141								
	1100ℓ All freezer	SR-S45DI	Metal	STS	140	1,110	-	1,110	6 Level temperature control (-24℃ ~ 5℃) Rapidity: 32℃ ▶ -5℃ : 82mins		-
	SR-S45DS	STS	138								
	1100ℓ All Fridge	SR-S45EI	Metal	STS	124	-	1,110	1,110		6 Level temperature control (-5℃ ~ 7℃)	35.0 2 grade of Energy efficiency
	SR-S45ES	STS	120								

1100ℓ 45Box - Stainless






1700ℓ 65Box



Type	Model No.	Material		SIZE (WxDxH)mm	Weight (kg)	Voulme(ℓ)			Temperature Range		Power Consumption (kWh/M)	
		External	Internal			Freezer	Fridge	Total	Freezer	Fridge		
	1700ℓ 1/3 freezer	SR-S65BI	Metal	STS	1,900x805x1,909	212	500	1,110	1,610	6 Level temperature control (-24℃ ~ 5℃) Rapidity: 32℃ ▶ -5℃ : 82mins	6 Level temperature control (-5℃ ~ 7℃)	98.0 2 grade of Energy efficiency
		SR-S65BS	STS			204						
	1700ℓ All freezer	SR-S65DI	Metal	STS	1,900x805x1,909	228	1,610	-	1,610	6 Level temperature control (-24℃ ~ 5℃) Rapidity: 32℃ ▶ -5℃ : 79mins	-	N/A
		SR-S65DS	STS			222						
	1700ℓ All Fridge	SR-S65EI	Metal	STS	1,900x805x1,909	210	-	1,610	1,610	-	6 Level temperature control (-5℃ ~ 7℃)	49.0 3 grade of Energy efficiency
		SR-S65ES	STS			204						

500ℓ 25Box




Type		Model No.	Material		SIZE (WxDxH)mm	Weight (kg)	Voulme(ℓ)			Temperature Range		Power Consumption (kWh/M)
			External	Internal			Freezer	Fridge	Total	Freezer	Fridge	
	500ℓ 1/2 freezer	SR-S25AI	Metal	STS	640x805x1,909	85	244	240	484	6 Level temperature control (-24℃ ~ 5℃) Rapidity: 32℃ ▶ -5℃ : 58mins	6 Level temperature control (-5℃ ~ 7℃)	N/A
		SR-S25AS	STS			83						
	500ℓ All freezer	SR-S25DI	Metal	STS	640x805x1,909	83	500	-	500	6 Level temperature control (-24℃ ~ 5℃) Rapidity: 32℃ ▶ -5℃ : 79mins	-	N/A
		SR-S25DS	STS			79						
	500ℓ All Fridge	SR-S25EI	Metal	STS	640x805x1,909	81	-	500	500	-	6 Level temperature control (-5℃ ~ 7℃)	22.0 2 grade of Engery efficiency
		SR-S25ES	STS			79						

※ STS = Stainless



Easiness of control
Best design, wide space to storage



Innovation of mechine room (280mm)

We provide a larger storage space by innovatively reducing the machine area with the best compressor load.



No silicon, no mold !

No need to worry about the mold from refrigerator, and there is no silicon in between the gaps present in the refrigerator.



Easy to use temperature control

The temperature of the refrigerator can be checked at a glance and its temperature can be controlled in a very convenient way.



Installed powerful refrigeration-ability of LG compressor

As we selected LG compressor, provide refrigeration ability and unnecessary to shift machine room due to surrounding environment.



Defrost the Freezer

Possible to give it a hose through the drain once frosts are removed! Cleanness maintained for 365days! Possible of clean storage!



Delicate temperature control of 1 degree celsius unit)

With digital touch screen, it is possible to control the temperature by 1 degree celsius unit.



Adjustable the height of a rack

It is possible to make use of the space rationally depending on the quantity of food stored by applying a rack with adjustable height.















LG customer services

All of the Starion products are capable of receiving LG service. (Except dishwasher)

STARION | Commercial side-dish refrigerator / Table



W900 Side-Dish Refrigerator		Type	Model No.	Material		SIZE (WxDxH)mm	Weight (kg)	Volume(ℓ)			Temperature Range	Remark								
				External	Internal			Upper Storage	Fridge	Total			Fridge							
	4		SR-V09EIE	Metal	STS	900x700x850	54	62	131	193	-5℃ ~ 10℃ (Adjustable by 1℃ unit)	Left handle								
			SR-V09EIF				Right handle													
			SR-V09ESE	Left handle																
			SR-V09ESF	Right handle																
W1000 Side-Dish Refrigerator			SR-V10EIE	Metal	STS	900x700x850	56					Left handle								
			SR-V10EIF				Right handle													
			SR-V10ESE	Left handle																
			SR-V10ESF	Right handle																
W1200 Side-Dish Refrigerator			SR-V12EIE	Metal			65	86	209	295		Left handle								
			SR-V12EIF				Right handle													
			SR-V12ESE	Left handle																
			SR-V12ESF	Right handle																
	3			SR-V12EIEVB	Metal	STS	1,200x700x850	67				-5℃ ~ 10℃ (Adjustable by 1℃ unit)	Left handle							
				SR-V12ESEVB				Left handle												
	6			SR-V12EIEVA	Metal			67	55	209	264		Left handle							
				SR-V12EIFVA				Right handle												
			SR-V12ESEVA	Left handle																
			SR-V12ESFVA	Right handle																
W1300 Side-Dish Refrigerator			SR-V13EIE	Metal	STS	1,300x700x850	67	86	209	295	-5℃ ~ 10℃ (Adjustable by 1℃ unit)	Left handle								
			SR-V13EIF				Right handle													
			SR-V13ESE	Left handle																
			SR-V13ESF	Right handle																
W1500 Side-Dish Refrigerator			SR-V15EIE	Metal			74	109	287	396										
			SR-V15ESE				71													
	4			SR-V15EIEVB			Metal						STS	1,500x700x850	76	71	287	358	-5℃ ~ 10℃ (Adjustable by 1℃ unit)	Able to open Two-door
				SR-V15ESEVB											73					
	7			SR-V15EIEVA	Metal			76												
				SR-V15ESEVA				73												
W1800 Side-Dish Refrigerator			SR-V18EIE	Metal	STS	1,800x700x850	89	132	365	497	-5℃ ~ 10℃ (Adjustable by 1℃ unit)	Able to open Two-door								
			SR-V18ESE				86													

4

* Number of Side-dish container

* STS = Stainless

4 ※ Number of Side-dish container ※ STS = Stainless



Innovation of mechine room (280mm)

We provide a larger storage space by innovatively reducing the machine area with the best compressor load.

No silicon, no mold!

No need to worry about the mold from side -dish&table, and there is no silicon in between the gaps present in the refrigerator.

Easy to use temperature control



The temperature of the refrigerator can be checked at a glance and its temperature can be controlled in a very convenient way.

W900 Table Refrigerator



W1000 Table Refrigerator





Type	Model No.	Material		SIZE (WxDxH)mm	Weight (kg)	Volume(ℓ)			Temperature Range	Remark
		External	Internal			Upper Storage	Fridge	Total	Fridge	
 W900 Table	SR-T09EIE	Metal		900x700x850	54	-	167	167	-5°C ~ 10°C (Adjustable by 1°C unit)	Left handle
	SR-T09EIF	STS			Right handle					
	SR-T09ESE	STS			Left handle					
	SR-T09ESF	STS			Right handle					
 W1000 Table (Customer built)	SR-T10EIE	Metal		1,000x700x850	56	-	167	167	-5°C ~ 10°C (Adjustable by 1°C unit)	Left handle
	SR-T10EIF	STS			Right handle					
	SR-T10ESE	STS			Left handle					
	SR-T10ESF	STS			Right handle					

W1200 Table Refrigerator



W1300 Table Refrigerator







Type	Model No.	Material		SIZE (WxDxH)mm	Weight (kg)	Volume(ℓ)			Temperature Range	Remark
		External	Internal			Upper Storage	Fridge	Total	Fridge	
 W1200 Table	SR-T12EIE	Metal		1,200x700x850	65	-	266	266	-5℃ ~ 10℃ (Adjustable by 1℃ unit)	Left handle
	SR-T12EIF	STS			Right handle					
	SR-T12ESE	STS			Left handle					
	SR-T12ESF	STS			Right handle					
 W1300 Table (Customer built)	SR-T13EIE	Metal		1,300x700x850	67	-	266	266	-5℃ ~ 10℃ (Adjustable by 1℃ unit)	Left handle
	SR-T13EIF	STS			Right handle					
	SR-T13ESE	STS			Left handle					
	SR-T13ESF	STS			Right handle					

W1500 Table Refrigerator



W1800 Table Refrigerator, Freezer/Fridge



Type	Model No.	Material		SIZE (WxDxH)mm	Weight (kg)	Volume(ℓ)			Temperature Range		Remark
		External	Internal			Upper Storage	Fridge	Total	Freezer	Fridge	
 W1500 Table	SR-T09EIE	Metal	STS	1,500x700x850	74	-	366	366	-	-5℃ ~ 10℃ (Adjustable by 1℃ unit)	Able to open Two-door
	SR-T09EIF	STS			71						
 W1500 Table (Freezer/Fridge)	SR-V15AIE	Metal			TBD	171.5	171.5	343	-25℃ ~ -15℃ (Adjustable by 1℃ unit)		Able to open Two-door
	R-V15ASE	STS			TBD						
 W1800 Table	SR-V18EIE	Metal	STS	1,800x700x850	89	-	465	465	-	-5℃ ~ 10℃ (Adjustable by 1℃ unit)	Able to open Two-door
	SR-V18ESE	STS			86						
 W1800 Table (Freezer/Fridge)	SR-V18AIE	Metal			TBD	171.5	271.5	443	-25℃ ~ -15℃ (Adjustable by 1℃ unit)		Able to open Two-door
	SR-V18ASE	STS			TBD						

※ STS = Stainless

STARION | Dishwasher



Simple display and convenient instructions

Aimed convenience of the users by minimizing the control buttons and expressing all the of the washer on the display screen.




Strong cleaning power of the water jet injection

Through Starion's exclusive cleaning nozzle, where the strong wash water pump is at its optimum round Bowls, cups, and bottle can be cleaned thoroughly without leaving any stain.



A water tank that does not rust do not have any leaks

Due to the same quality of material (stainless), there is no leakage.

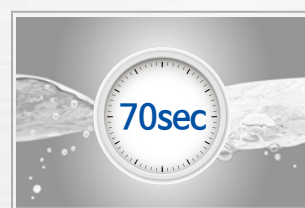

Duration of cleaning

Average time: 70 sec
(Washing :55sec, stopping: 3sec, rinsing: 12sec)
Cleaning and rinsing time can be controlled according to the tendency of customers.



Pausing and self-diagnosing function

By applying the thermal fuse and overweight prevent devices if a problem occurs, the error sign and application of pausing function will stop the washer action and let it relax to aim for safety.



Possible to control the cleanliness Standard acquisition on the surrounding environment

We optimized the requirements of washer by regulation not only cleansing, washing time, but also detergent and rinse.



Standard acquisition

products that are accepted for their quality and safety by undergoing safety certified products.



Applying detergent rinse, and feeder for slump

Instead of roll pumps, it can be used conveniently with no minor breakdowns, by applying the slump that has strong detergent reaction, and using the right amount of detergent

Type	Model No.	Weight	Size (WxDxH)mm	Voltage	Maximum Electric Power	Washing-Rinse					Cleaning Power(Per hour)				
						Mode	Tank Capacity	Washing · Rinse Time	Pump Capacity	Hot Water	Maximum Temperature	Small/Mdium size of plate types	Rice bowl types	Noddle bowl types	Glass types
Dishwasher	SW-D500C	80 Kg	Door-closed 650x650x1,350	220V~, 60Hz Single -phase current	3.8 kW	spary Up and down / rotary mode	Washing : 42 Li Rinsing : 28 Li	Washing : 35 ~ 95sec (Adjustable by 5sec) Rinsing : 5 ~ 30sec (Adjustable by 1sec)	Washing : 1.1 kW Rinsing : 0.1 kW	×	Washing 85℃ ± 10%	1,500 ~ 1,800개	1,500개	360 ~ 480개	2,000개
	SW-D500H	85 Kg	Door-opend 650x650x1,850	5 kW				○	Washing · Rinse 85℃ ± 10%						

Dishwasher customer service **1588-2463** Starion provides own direct supporting service for your convenience and better services (only Dish-Washer)



Cooking through a starion electric stove offer healthy foods

**Wonderful Kitchen,
dreaming of wonderful Style!**



Adoption of German's SCHOTT

SCHOTT Glass well-know for best durability and thermal efficiency




Adoption of German's G.E.O

3~5sec of heating speed, 650°C~700°C
Prevent the destroy of nutrient



Adoption of dual wide burner

Possible to use from small pot to big pot




Applied Euro style's pattern

Applied anti-fingerprint
Good for prevention of contamination



Easy to clean

through the easy and simple to clean
everydays stove keep clean



Directly connect to power plug

Installation of Starion product
(Only offer to who buy free stand)



Slide / Soft Touch Mode

Convenience in use and sensitive touch
mode with finger




Smart Safety Device

Child-lock, Automatic turn off mode,
automatic power off Accident prevention function including

STARION | 3 Burners Hybrid / 3 Burners Highlight



Installation of various places

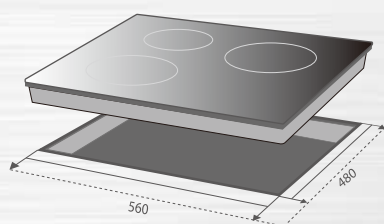

- Possible to install of your kitchen
(※ Standing type case is not including)
- Built-in/ Standing type case (150mm / 80mm)
Requirement Size : 560(W)x480(D)

Comparison of consumption in time and energy for boiling 1L of water

Boiling Time (25°C → 100°C)



SE-HY63SIC
Hybrid 3 burners



SE-HLP63SIA
Highlight 3 burners



SE-HL63SIA
Highlight 3 burners



SE-HL63SIB
Highlight 3 burners


Type	Model No.	Glass Type	Heating Element	SIZE (WxDxH)mm	Power Consumption	Level of heat power	Functions	Timer	Pause mode	Voice guide	Control Mode
Hybrid 3 burners	SE-HY63SIC	SCHOTT	E.G.O	590x510x52	3,300W	9 Levels	HighSpeed Heatup/ Warning system Automatically turn off / Child lock	○	○	○	Touch & Slide
Highlight 3 burners	SE-HLP63SIA	SCHOTT	E.G.O	590x510x52	3,300W	9 Levels	Child lock / Warning system Automatically turn off	○	○	○	Touch & Slide
	SE-HL63SIA	N.E.G	Ceramiste	590x510x52	3,300W	9 Levels	Child lock / Warning system Automatically turn off	X	X	○	Touch
	SE-HL63SIB	N.E.G	Ceramiste	590x510x52	3,300W	9 Levels	Child lock / Warning system Automatically turn off	X	X	X	Touch

※ Induction burner accept for induction container only

STARION | 2 Burners Highlight · 1 burners Induction



Highlight Electric Stove

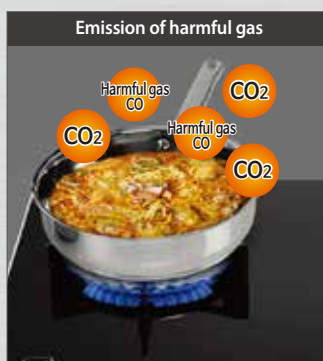

Gas Stove


No more worry about harmful gas
Starion Electric Stove!

Though the easy and simple cleaning,
Use it always cleanly

Premium Kitchen starts from Premium Stove



SE-HL62SIA
Highlight 2 burners

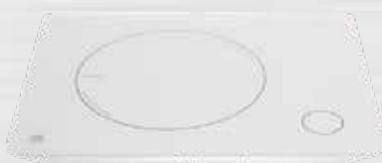

STI2100-WBW
Induction 1 burner (White)




STI2100-BCB
Induction 1 burner (Black)

Type	Model No.	Glass Type	Heating Element	SIZE (WxDxH)mm	Power Consumption	Level of heat power	Functions	Timer	Pause mode	Voice guide	Control Mode
Highlight 2 burners	SE-HL62SIA	SCHOTT	Ceramiste	590x510x52	3,300W	9 Levels	Automatically turn off/ Warning system	○	○	○	Touch

Type	Model No.	Glass Type	Color	SIZE (WxDxH)mm	Power Consumption	Level of heat power	Functions	Timer	Pause mode	Voice guide	Control Mode	Display
1burner Induction	STI2100	Borosilicate Glass	White	378x293x55	2,100W	15 Levels	HighSpeed Heatup Heat Insulation/ Warning system	○	○	X	Touch	Hidden LED
	STI2100-WBW							○	○	○		
	STI2100-BCB	Ceramics Glass	Black					○	○	○	Touch	Printing

STARION | Standing Tower Fan · Airo-Cook



Type	Model No.	Color	Power Consumption	SIZE (WxDxH)mm	Weight	Screen	Touch system	Remote Control	Timer	Sleeping mode
타워팬 선풍기	SF-T4011RH STF-B40CCB	All Black	40W	257x300x985	4.5Kg	LCD (Orange)	Button	○	7.5 (0.5hr)	LCD Lighting ON/OFF
	SF-T4014RH STF-B40CCWB	White & Black	40W	257x300x985	4.5Kg	LCD (Orange)	Button	○	7.5 (0.5hr)	LCD Lighting ON/OFF
	SF-T4015RH	All White	40W	257x300x985	4.5Kg	LCD (Orange)	Button	○	7.5 (0.5hr)	LCD Lighting ON/OFF
	STF-B42CCPB	Purple & Black	45W	300x350x1,050	6.0kg	LCD (Blue)	Button	○	7.5 (0.5hr)	X
	SF-T4512RH STF-B42CCDB	Dark Walnut & Black	45W	300x350x1,050	6.0kg	LCD (Blue)	Button	○	7.5 (0.5hr)	X



ECO

Made by new material of TRX
0% of endocrine disruptor



Safety Devices

Safe cooking is allowed with 5 steps of safety device safety layer(ON/OFF) system, mechanical heating protect device, main part and - ball part apparatus for shutting off a power supply protection of motor overheating device, Protection of PCB -overheating device



Big Capacity

Possible to cook lashings of foods at a time



Convenience in use

LED touch pad / Possible to Adjust by minute unit and 5 degree unit / Easy to clean due to applied TPX

Type	Model No.	Power Consumption	SIZE (WxDxH)mm	Voulme	Rated Voltage	Weight	Safety Device
Airo-Cook	STO-1200	Halogen lamp/1,200W	375x360x375	14.5L	220V / 60Hz	Approx. 5kg	5steps of Safety device

STARION | Heater · Rotary Heater



No.1 sales
in KOREA for 15years

Powerful and high efficiency burner
makes your places warm quickly



43㎡

6,500Kcal

Audio guidance

43㎡
SH-R06VCG

Light Brown
Vaporization high pressure discharge ignition
Audio guidance

- Caloric Value: 6,500 Kcal
- Tankage: 16.5ℓ
- Fuel Consumption:
Max. combustion 0.78(ℓ/h)
- Fuel Sustainment time :
Maximum combustion approx.18hr
- Size((WxDxH) : 441x541x700mm
- Weight: 19.5 kg
- Power Consumption Value: 30W(Combusting)



43㎡ SH-R06SCG

Light Brown
Vaporization high pressure discharge ignition
Audio guidance

- Caloric Value: 6,500 Kcal/h
- Tankage: 16.5ℓ
- Fuel Consumption:
Max. combustion 0.78(ℓ/h)
- Fuel Sustainment time :
Maximum combustion approx.18hr
- Size((WxDxH) : 441x541x700mm
- Weight: 19.5 kg
- Power Consumption Value: 30W(Combusting)



56㎡ SH-R08SCG

Light Brown
Vaporization high pressure discharge ignition
Audio guidance

- Caloric Value: 8,000 Kcal/h
- Tankage: 16.5ℓ
- Fuel Consumption:
Max. combustion 0.97(ℓ/h)
- Fuel Sustainment time :
Maximum combustion approx.15hr
- Size((WxDxH) : 441x541x700mm
- Weight: 19.5 kg
- Power Consumption Value: 35W(Combusting)



79㎡ SH-R11SCG

Light Brown
Spin atomization high pressure discharge ignition
Audio guidance

- Caloric Value: 11,500 Kcal/h
- Tankage: 20ℓ
- Fuel Consumption:
Max. combustion 1.35(ℓ/h)
- Fuel Sustainment time :
Maximum combustion approx.13hr
- Size((WxDxH) : 473x574x785mm
- Weight: 23.5 kg
- Power Consumption Value: 26W(Combusting)



56㎡ SH-R08VCG

Light Brown
Vaporization high pressure discharge ignition
Audio guidance

- Caloric Value: 8,000 Kcal/h
- Tankage: 16.5ℓ
- Fuel Consumption:
Max. combustion 0.97(ℓ/h)
- Fuel Sustainment time :
Maximum combustion approx.15hr
- Size((WxDxH) : 441x541x700mm
- Weight: 19.5 kg
- Power Consumption Value: 35W(Combusting)



79㎡ SH-R11SBG

Light Brown
Spin atomization high pressure discharge ignition
Audio guidance

- Caloric Value: 11,500 Kcal/h
- Tankage: 20ℓ
- Fuel Consumption:
Max. combustion 1.35(ℓ/h)
- Fuel Sustainment time :
Maximum combustion approx.13hr
- Size((WxDxH) : 473x574x785mm
- Weight: 23.5 kg
- Power Consumption Value: 26W(Combusting)



102㎡ SH-R15SCG

Light Brown
Spin atomization high pressure discharge ignition
Audio guidance


- Caloric Value: 15,000 Kcal/h
- Tankage: 20ℓ
- Fuel Consumption:
Max. combustion 1.8(ℓ/h)
- Fuel Sustainment time :
Maximum combustion approx.10hr
- Size((WxDxH) : 473x574x785mm
- Weight: 23.5 kg
- Power Consumption Value: 28W(Combusting)



11 functions of safety device

- | | |
|-------------------------------------|-----------------------------------------------|
| Ignition Safety device | Prevention device of explosion ignition |
| Protection of over heating | Motor protection device |
| Prevention device of incomplete | Impact adsorption device |
| prevention of low fuel | Protection of over heating system |
| Protection of when electric is gone | 3hours automatic fire extinguishing appliance |
| Combustion control device | |

Far infrared ray of emsion effect

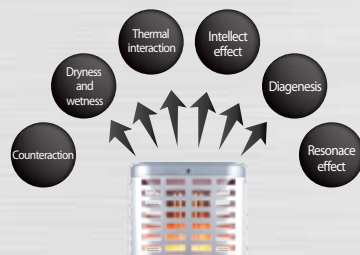

14 Levels of attemperation system



Possible to adjust temperature in
14 levels of attemperation system
(Products of a different company
only offer 7levels of attemperation system)

STARION | Oil Heater· Heater



Starion heaters are suitable for wide place
Far infrared ray free heating

Improved 20%



By improved burner, exhaust NOx is 20% lesser

Improved 20%



By applied BAFFLE improved heating speed and 20% of fuel efficiency (Applied on SH-09series)



All model applied remote control mode

93m²

10,000Kcal



93m²
SH-F10SDG

Light brown / Remote control
Audio guidance / Touch switch system
Applied new WHITE LED


- Calorie: 10,000 Kcal
- Electric power consumption: 70W(during the combustion)
- Tankage: 30ℓ
- Weight: 51.5 kg
- Fuel consumption: 1.1ℓ/h
- Size(WxDxH) : 950x350x1,120mm



82.5m² SH-F09SSG

Grey / Applied New COLOR
Remote control / Audio guidance
Touch switch system
Applied new WHITE LED


- Calorie: 9,000 Kcal
- Electric power consumption: 70W(during the combustion)
- Tankage: 30ℓ
- Weight: 46 kg
- Fuel consumption: 1.0ℓ/h
- Size(WxDxH) : 950x350x960mm



82.5m² SH-F09SIG

Grey / Applied New COLOR
Remote control / Audio guidance
Touch switch system
Applied new WHITE LED


- Calorie: 9,000 Kcal
- Electric power consumption: 70W(during the combustion)
- Tankage: 30ℓ
- Weight: 46 kg
- Fuel consumption: 1.0ℓ/h
- Size(WxDxH) : 950x350x960mm
- Derivative model : SH-F09SCG



82.5m² SH-F09SRG

Wine Red / Remote control
Audio guidance
Touch switch system
Applied new WHITE LED


- Calorie: 9,000 Kcal
- Electric power consumption: 70W(during the combustion)
- Tankage: 30ℓ
- Weight: 46 kg
- Fuel consumption: 1.0ℓ/h
- Size(WxDxH) : 950x350x960mm



102m² SH-F11SIG

Ivory / Remote control
Audio guidance
Touch switch system
Applied new WHITE LED


- Calorie: 11,000 Kcal
- Electric power consumption: 70W(during the combustion)
- Tankage: 30ℓ
- Weight: 50 kg
- Fuel consumption: 1.2ℓ/h
- Size(WxDxH) : 950x350x1,120mm
- Derivative model : SH-F11SCG



139m² SH-F15SIG

Grey / Remote control
Audio guidance
Touch switch system
Applied new WHITE LED


- Calorie: 15,000 Kcal
- Electric power consumption: 70W(during the combustion)
- Tankage: 30ℓ
- Weight: 64 kg
- Fuel consumption: 1.75ℓ/h
- Size(WxDxH) : 1,150x350x1,280mm
- Derivative model : SH-F15SCG















179m² SH-F19SIG

Grey / Remote control
Audio guidance
Touch switch system
Applied new WHITE LED

- Calorie: 19,000 Kcal
- Electric power consumption: 70W(during the combustion)
- Tankage: 30ℓ
- Weight: 70 kg
- Fuel consumption: 2.15ℓ/h
- Size(WxDxH) : 1,300x350x1,280mm




Country's most 12functions of safety devices (All models are same)

- | | |
|----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  Protection of over heating |  Revention device of burner overheating |
|  Ignition Safety device |  Provention of over current |
|  1~3hr automatic fire extinguishing appliance |  Abnormal combustion of control device |
|  Perception of low fuel |  Prevention device of explosion ignition |
|  Motor and Burner protection device |  Impact adsorption device |
|  Protection of when electric is gone |  Its automatically sensor dring a room temperature operating in abnormality |

Concept of high efficiency heater



Common heater of temperature distribution



Far infrared ray heater temperature distribution

It's suitable for places where wide open spaces or high ceiling.

Suitable location for far infrared ray heater



INDOOR Lobby(Hotel · Bank · School · Building) restaurant · Rest Room · Hospital · Lilbrary Training Institue · Office · Store · Church Petrol Station · Pharmacy, so on

OUTDOOR Golf Club · Amusement Park · Outdoor Event hall · Picture Ourdoor Location Car Center · Airport · Terminal · Factory Construction location · Ski Resort, so on

STARION SERVICE CENTER

1588-2203



Informations of Starion's service center

◦ Main service center contact number

Contact us when you have problem with products
(Everywhere in Korea)

1588-2203

Operation hours

Weekdays | 08:00 ~ 19:00

Saturday | 08:00 ~ 16:30 (Closed on public holiday)


◦ Starion Website

Apply to Starion service center and support

www.starion.co.kr

By internet service provides faster and
easier supporting

Starion service center in Korea

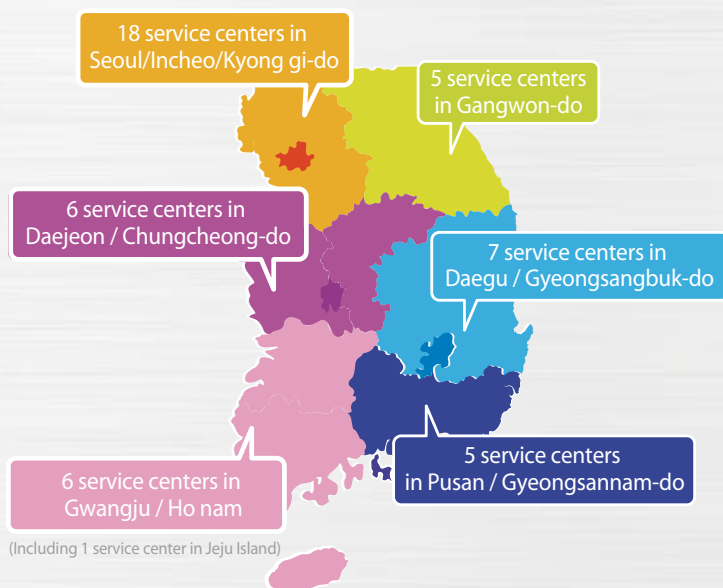

**LG Service center support
for all starion products.**

(Dishwasher is not including)

◦ LG electronics service center

LG Electronics have 120 Service center in Korea
and we provide best supporting and caring system

1544-7777, 1588-7777

Operation hours

Weekdays | 09:00 ~ 18:00

Saturday | 09:00 ~ 13:00 (Closed on public holiday)



**Always think of you first!
Starion will be always with you forever**

Our special products are only for you !
Starion's 50years of technology skill !
that make you more special !



STARION

A/S Center Starion Product Support 1588-2203 / LG Electronics Product Support 1544-7777, 1588-7777
(46332) 76, Gondanse-ro, 18 Beon-Gill, Geumjeong-Gu, Busan, Korea / www.starion.co.kr

- The introduction of product in this catalogue is aimed to only help customer enhance their understanding regarding the characteristics of the products. And the contents here may be altered due to market trends and the time when it is released. So, when purchasing the product, please check for accurate information from the Salesperson.
- The color of the product shown in this catalog may be different from their original color due to printing process.
- You will be asked for fine responsibility due to copyright law if you will illegally expropriate .